

SureLock™

BT Series Mini-Benchtop Stabilized Laser

Attalon BT Stabilized Lasers are engineered to be ultra-compact, durable, and easy to use, making them an ideal choice for Raman spectroscopy applications. Featuring the Attalon SureLock™ Laser, the BT Mini-Benchtop Laser ensures steady, high-power, and spectrum-narrowed performance while maintaining low power consumption. All SureLock™ Series lasers are stabilized by the Attalon PowerLocker™ Volume Holographic Grating (VHG), providing precise, ultra-stable center wavelengths with narrow spectral bandwidth. This stability is maintained across full power range, from 0% to 100%, ensuring consistent spectral performance, making these lasers highly reliable for demanding applications.

The BT Laser comes equipped with easy-to-adjust local manual controls, a standard FC/PC connectorized fiber output, and a user-friendly touchscreen interface. It offers better than 1% power stability and a warm-up time of less than 1 minute, ensuring quick and reliable operation. Designed for both laboratory and OEM use, these lasers deliver exceptional temperature insensitivity, making them perfect for Raman spectroscopy applications where stability and reliability are crucial.



FEATURES

- Achieve high resolution and precise Raman measurements with narrow spectral bandwidth, typical 0.08nm
- Adjustable output from few mW to 500mW for a broad range of Raman applications
- High signal purity for accurate spectra with side mode suppression ratio, SMSR, greater than 40 dB
- Simplify setup complexity and insure consistent results with integrated drive electronics and temperature control
- User friendly digital and manual controls allowing for precise tuning to meet specific needs
- Plug-and-play with integrated e-stop and keyswitch
- Connectorized FC/PC 105um MM, 0.22NA fiber coupled output
- Optional patch cables available for either FC/PC or SMA end connector
- Customized wavelength options available

APPLICATIONS

- Raman Spectroscopy
- Metrology
- Bio-instrumentation
- Sensing
- Analytical Instrumentation

SureLock™ BT Laser Module

Specifications	638 nm	785 nm	830 nm	1064 nm
SKU	115-81063-012	115-81063-001	115-81063-002	115-81063-005
Output Power (mW), Maximum	300	<500	<500	<500
Center Wavelength (nm)				
Minimum	637.5	784.5	829.5	1063.5
Typical	638	785	830	1064
Maximum	638.5	785.5	830.5	1064.5
Spectral Bandwidth (FWHM nm)				
Typical	0.07	0.08	0.08	0.09
Maximum ³	0.15	0.15	0.15	0.15
Spectral Bandwidth (FWHM cm ⁻¹)				
Typical	1.7	1.2	1.2	0.8
Maximum ³	3.7	2.4	2.2	1.3
Sidemode Suppression Ratio, SMSR (dB)				
Minimum	40	40	40	40
Central Stabilized Temperature ¹ (°C)				
Minimum	15	15	15	15
Maximum	40	40	40	40
Fiber Type: Standard	105um core 0.22NA FC/ PC Connector. Optional patch cable with FC/PC or SMA available			
Power Stability (%) (5 hour)	3%			
Operating Requirements				
Electrical Requirements	Supplied with power supply, 5VDC 3A or 12VDC 1A			
Operating Temperature ² (°C)				
Minimum	0	0	0	0
Typical	25	25	25	25
Maximum	40	40	40	40
Storage Temperature ² (°C)				
Minimum	-10	-10	-10	-10
Maximum	60	60	60	60

All specifications are at rated power with a case temperature of 25°C unless otherwise noted. Wavelengths specified are vacuum referenced. Ex: 632.991nm vacuum referenced is equivalent to 632.816nm standard air referenced for HeNe


¹ Temperature set point is internal TEC set point. R-T thermistor data is available to determine actual thermistor setting.

² Non-condensing


³ Measurement system is resolution limited. Actual performance may be better.

Typical Performance


Wavelength Stability (Sample)

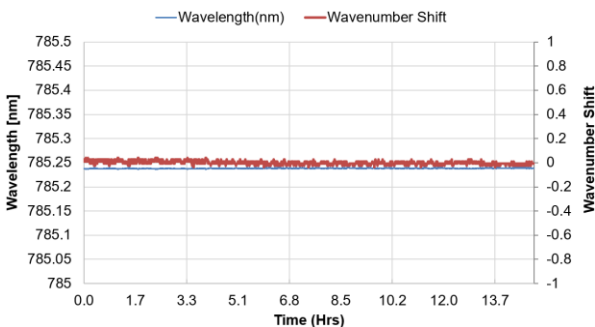

Optical Spectrum (Sample)

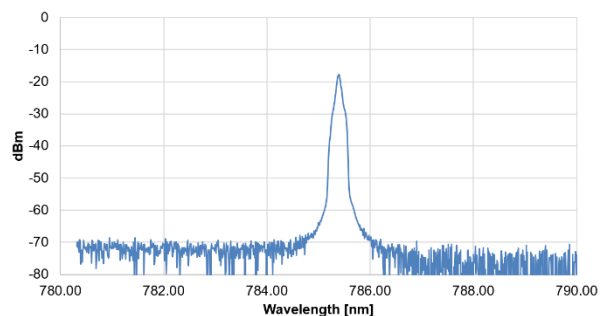

Outline Drawing (all dimensions in mm)

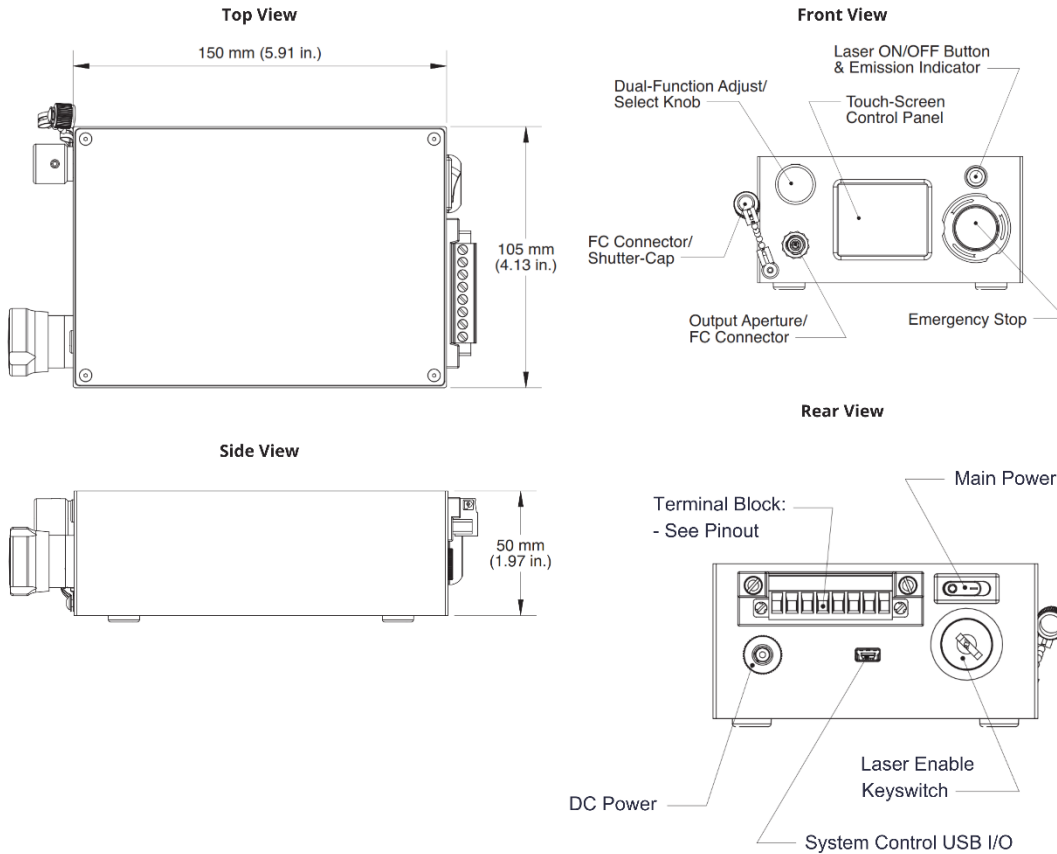

Pin	Description
1	Digital M+
2	Signal GND
3	Analog M+
4	N/C
5	5-12V DC
6	DC GND
7	Interlock
8	Interlock

Optional Accessories

- 118-90000-414; FC/UPC to FC/UPC Connectors, 105um 0.22NA Fiber, Step Index, 3mm OD SS Jacket, 3 Meters Long
- 118-90000-415; FC/UPC to SMA905 Connectors, 105um 0.22NA Fiber, Step Index, 3mm OD SS Jacket, 3 Meters Long
- 118-90000-350; E2000-UPC to FC/PC, 105um 0.22NA Fiber, Step Index, 3mm OD SS Jacket, 3 Meters Long

Warnings:

Fiber Tip Cleanliness: Inspect and clean all fiber tips before mate. Dirty or contaminated fiber tips could cause permanent damage to fiber connector. Cover all fiber tips when not in use. Damage to fiber connector is not covered by warranty.

Laser Eye Safety: Use protective eyewear and follow local regulatory requirements for use of laser diodes.

Environmental Conditions: Units are intended for use in laboratory environments with reasonable airflow for thermal dissipation. Allow reasonable clearance around the unit for air flow.

Remote Control Limitations: Values entered via USB are not limit or type checked. Improper use may result in permanent damage to the laser diode.

